




# Pigra Comercial Group S.A. de C.V.




## PIG8025HA1 PIG8025HA2

### Features

- Size: 80×80×25mm(3.15×3.15×1.0in)
- Frame: Aluminum Painted&Plastic UL94V-0
- Impeller: Reinforced Plastic UL94V-0
- Bearings: Ball Bearing&Sleeve Bearing
- Life Expectancy: 50,000 Hours at 20°C-Ball  
30,000 Hours at 20°C-Sleeve
- Approvals: UL CUL CE 3C RoHS
- Weight:130g

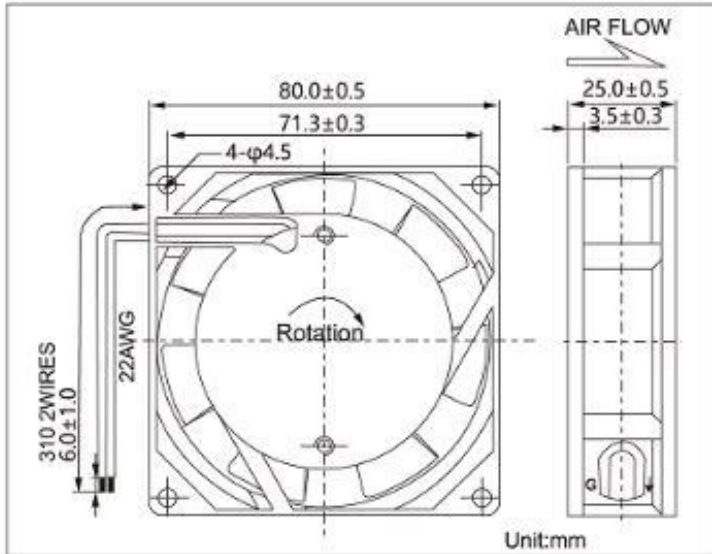

### Air Flow vs Air Pressure

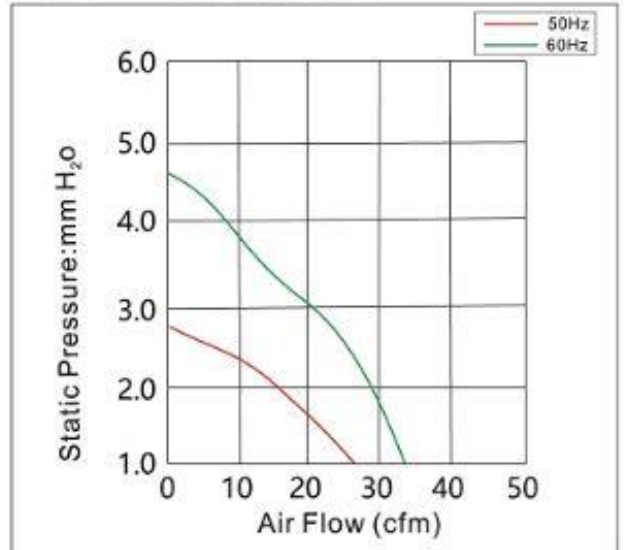

### Performance

Model	Part Number	Bearing System	Rated Voltage (V)	Operating Frequency (Hz)	Current (A)	Input Power (W)	Nominal Speed (R.P.M)	Air Flow (CFM)	Air Pressure (mm-H <sub>2</sub> O)	Noise (dBA)
PIG8025HA1	FSY8025HA1SL	Sleeve or	110/120	50/60	0.12/0.14	10/15	2300/2850	26/33	2.80/4.58	29/33
	FSY8025HA1BL	Ball								
PIG8025HA2	FSY8025HA2SL	Sleeve or	220/240	50/60	0.06/0.10	11/16	2300/2850	26/33	2.80/4.58	29/33
	FSY8025HA2BL	Ball								